

# MC-EX3051

## Multi-purpose 3LCD Projector



**PJLink™**

**CRESTRON**

**HDMI™**  
HIGH DEFINITION MULTIMEDIA INTERFACE

**AMX**

**3LCD**

**Introducing our innovative multi-purpose 3LCD MC-EX3051 projector which combines all our technical expertise with our market leading knowledge.**

This multi-purpose projector can produce 3300 ANSI, has a 20,000:1 contrast ratio and a resolution of 1024 x 768.

So whether you are on the move or in an office, our MC-EX3051 multi-purpose projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

#### Key Features:

XGA 1024 x 768 resolution

3300 ANSI lumens / colour light output

20,000:1 contrast ratio

Images up to 300" diagonal

Built-In lens

Filter life 10,000 hours

3 year/6 month warranty\*



*Please note: Content, technical specifications and images are subject to change.*

*\*For education and extended warranties please contact your local dealer.*


# MC-EX3051 3LCD Multi-purpose Projector

## Technical Specifications

<b>Display System</b>	3 LCD 16mm (0.63")	<b>Security Features</b>	PIN Security Lock, MyScreen Password Lock, Transition Detector, MyText Password Lock, Key Lock (Key pad, Remote Control)
<b>Panel Structure</b>	3LCD	<b>On Screen Display Languages</b>	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkey, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew
<b>Resolution</b>	XGA (1024 x 768)	<b>Digital Input</b>	HDMI x 2 (HDCP compliant)
<b>Light Output (Brightness) ANSI Lumens (Normal)</b>	3300 (Normal)	<b>Analogue Input</b>	15-pin Mini-D-Sub x 2, RCA Jack x 1
<b>Contrast Ratio</b>	20,000:1	<b>Video Output</b>	15 pin Mini D-Sub x 1 (shared with analog computer input)
<b>Light Source</b>	Lamp	<b>Audio Input</b>	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
<b>Lamp Life (Hours)</b>	6000 (Normal), 12,500 (Eco)	<b>Audio Output</b>	3.5mm Stereo Mini Jack x 1
<b>Lens</b>	Built-in	<b>RS-232C Control</b>	1 x 9-pin D-Sub
<b>Number of Colours</b>	16.7 million colours	<b>Wireless LAN</b>	USB-WL-5GM wireless adapter (optional)
<b>Lens Zoom</b>	Manual zoom x 1.2	<b>Wired LAN</b>	RJ45 connector x 1
<b>Lens Focus</b>	Manual focus	<b>USB Type-A</b>	USB Type A x 1 (PC less Presentation or Wireless adapter)
<b>Projection Lens F Number</b>	2.1-2.3	<b>USB Type B</b>	USB Type B x 1 (USB display or USB mouse control)
<b>Focus Distance</b>	0.8 – 9.0m (Wide), 1.0 – 10.8m (Tele)	<b>Power Supply</b>	AC 100V – 120V / AC 220V – 240V (50/60Hz)
<b>Distance to Width Ratio/ Throw Ratio (:1)</b>	1.5 - 1.8	<b>Operating Power Consumption</b>	310W
<b>Diagonal Display Size</b>	30 - 300"	<b>Standby Power Consumption</b>	Less than 0.35W
<b>Installation</b>	Ceiling, Tabletop, Rear	<b>Weight</b>	3.5kg
<b>Speakers</b>	16W mono	<b>Dimensions (W x H x D)</b>	349 x 264 x 88mm
<b>Digital Keystone Correction (Degrees)</b>	Horizontal ± 30°, Vertical ± 30°	<b>Noise (Normal)</b>	37dB (Normal) / 28dB (Whisper)
<b>Picture Modes</b>	Normal, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, Photo, DICOM SIM	<b>Filter Life (Hours)</b>	10,000
<b>Picture Adjustments</b>	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51 Hz, 59 to 61 Hz), HDCR, Image blank by RS232C/Remote control, Image Optimizer, Magnify, Mirror Reverse Image, Up-side Down Image	<b>Certification</b>	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class B), EN55035 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS/ErP compliant
<b>Operating Features</b>	Audio pass through, Audio ports assign, Audio out (standby) and monitor out / selectable source with MENU, Auto eco mode, Auto power off, Auto signal search, Direct power on, Image blank by RS232C/Remote control, LED lamps (power, lamp, temp), Magnify 4 times (XGA) by RS232C / remote control, MyButton by remote control, MyMemory, MySource, MyText, MyScreen, Picture freeze by RS-232C / remote control, Serial number displayed on EASY MENU and on the side of projector, Source naming (in English), Stand-by audio	<b>Computer</b>	IBM Compatible VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/UXGA/HD (Compressed), MAC16"
<b>Network Features</b>	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling, Crestron RoomView® (Not accessible through the wireless adapter), Displaying text data transferred via network, Failure and Warning Alerts via E-mail, My Image (still image transfer) Display, Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie), PJLink™, Projector Management via SNMP, Projector Quick Connection	<b>Video</b>	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
		<b>Supplied Accessories</b>	Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Concise User Manual x1, Security Label x1, Lens Cover x1, Adapter Cover x1
		<b>Optional Accessories</b>	USB wireless adapter USB-WL-5GM
		<b>Remote Control</b>	HL03037
		<b>Replacement Lamp, Filter</b>	DT02081M (without Filter), UX39561
		<b>Projector/Lamp Warranty</b>	3 years / 6 months (for education and extended warranties please contact your local dealer)

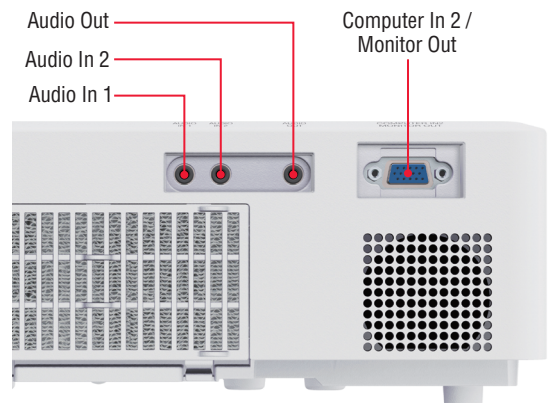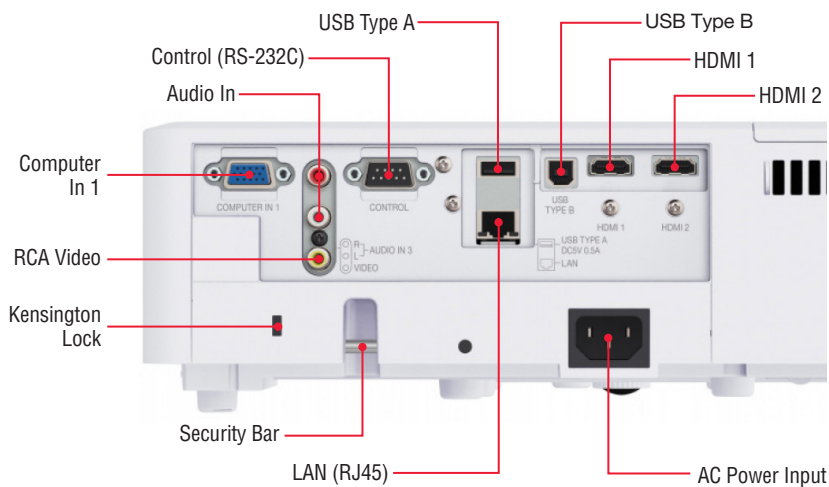

Dealer Stamp



**maxell**  
Within, the Future  
**Maxell Limited**

Whitebrook Park, Lower Cookham Road,  
Maidenhead, Berkshire, UK, SL6 8YA  
Tel: +44 (0)1628 585 000  
www.maxelldisplay.com

Specification and photography subject to change.