

MC-X8801W

3LCD Projector



Introducing our latest 3LCD MC-X8801W projector which combines all our technical expertise with our market knowledge.

This new 3LCD, XGA projector, is brought to market with 10,000:1 contrast ratio. The MC-X8801W offers 8000 ANSI lm, making it a perfect model for integrating into applications such as museums, retail and large conference rooms. With seven optional lenses to choose from and set-up for blending and warping make it easier when using the software tool that includes colour uniformity adjustment which makes it ideal for multi projector installations.

Key Features:

- XGA 1024 x 768 resolution
- 8000 ANSI lumens / Colour light output
- 10,000:1 contrast ratio
- Images up to 600" diagonal
- Motorised lens shift, zoom and focus
- 7 Optional Lenses
- 3 years / 6 month warranty*

Please note: Content, technical specifications and images are subject to change.



**For education and extended warranties please contact your local dealer.*

MC-X8801W 3LCD Projector

Technical Specifications

Panel Size	3LCD 20mm (0.79")
Panel Structure	3LCD
Resolution	XGA (1024 x 768)
Light Output (Brightness) ANSI Lumens	8000 (Normal), 6400 (Eco)
Contrast Ratio	10,000:1
Light Source	Lamp
Lamp Life (Hours)	2000 (Normal), 4000 (Eco)
Number of Colours	16.7 million colours
Lens	Interchangeable, not included
Lens Zoom	Powered Zoom x 1.7 (Standard Lens ML-713M)
Lens Shift	Motorized
Lens Focus	Powered Focus
Lens Shift	Motorized: Vertical 0 – +50%; Horizontal +/-10% (Standard Lens ML-713M)
Projection Lens F Number	1.6 – 2.0 (using ML-713M)
Focus Distance	1.1 – 21.4m (Wide), 1.9 – 36.4m (Tele) (ML-713M)
Distance to Width Ratio/Throw Ratio (:1)	1.7 – 2.9 (ML-713M)
Diagonal Display Size	30 – 600" (FL-710M 100" – 350")
Speakers	8W Stereo
Digital Keystone Correction (Degrees)	Horizontal ±37.5°, Vertical: ±37.5° (ML-713M)
Picture Modes	Standard, Natural, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, DICOM Sim.)
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Image optimizer, Magnify, Mirror reverse image, Up-side down image
Operating Features	Accentualizer and HDCR 2, Auto Power Off, Auto signal search & Source skip, Blending/Cropping, Closed Caption (CC1– 4, TEXT1– 4) support NTSC (Video) and 480i (Component signal), Digital Keystone Correction, Direct Power On, Eco Mode, Equalizing Colour temperature Adjustment, Equalizing Digital Gamma Correction, Filter timer, Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDBase-T, Image blank by RS232C/Remote control, LED lamps (Filter, Shutter, Security, Lamp-1, Lamp-2, Temp, Power), Lens memory (Lens shift position, Lens type), MAC address displayed on the side of projector, Magnify 4 times (XGA) by RS232C/Remote control, Mechanical shutter, Mirror Reverse Image, Up-side Down Image, My Button by Remote control, My Memory, My source, My Text, MyScreen, Overscan (Video, Component video signal), Perfect Fit (4 corners), capable of saving/loading the setup, Picture by Picture/Picture in Picture, Picture Freeze by RS-232C /Remote control.
Network Features	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling, Crestron RoomView® (Not accessible through the wireless adapter), Displaying text data transferred via network, Extron XTP system, Failure and Warning Alerts via E-mail, My Image (still image transfer), Display, Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie). ----- reference purpose only, PjLink™, Projector Management via SNMP

Security Features	PIN Security Lock, MyScreen Password Lock, Transition Detector, My Text, Password Lock, Key Lock (Key pad, Remote Control), Lens Lock
On Screen Display Languages	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkey, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese
Digital Input	HDMI x 2, HDBaseT x 1, DisplayPort x 1
Analogue Input	15 pin Mini D-Sub x 1, RCA Jack x1
Video Output	15 pin Mini D-Sub x 1
Audio Input	3.5mm Stereo Mini Jack x 1, RCA Jack (L/R) x 1
Audio Output	RCA Jack (L/R) x 1
RS-232C Control	1 x 9-pin D-Sub
Wireless LAN	USB-WL-11N wireless adapter (optional)
Wired LAN	RJ45 connector x 1
USB Type-A	USB Type A x 1 (wireless adapter)
Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Operating Power Consumption	560W
Standby Power Consumption	Less than 0.35W
Weight	11.1kg
Dimensions (W x H x D)	498 x 156 x 426mm
Noise	40dB (Normal), 33dB (Eco)
Filter Life (Hours)	20,000
Certification	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant
Computer	IBM Compatible VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/WSXGA+/UXGA/HD (Compressed), MAC16"
Video	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, Security Label x1, Lens Hole Cover x1, Adapter Cover x1, Terminal Cover x1, HDMI Cable Holder x2, Cable Tie x2
Optional Accessories	USB wireless adapter USB-WL-11N, Wireless pen tablet TB-1, Optional Lenses: Ultra-short-throw FL-710M, Short-throw USL-701M, Short-throw FL-701M, Short-throw SL-712M, Standard-throw ML-713M, Long-throw LL-704M, Ultra-long-throw UL-705M
Remote Control	HL02805
Replacement Lamp/Filter	DT01881M, UX40821
Projector/ Lamp Warranty	3 years / 6 months (for education and extended warranties please contact your local dealer)

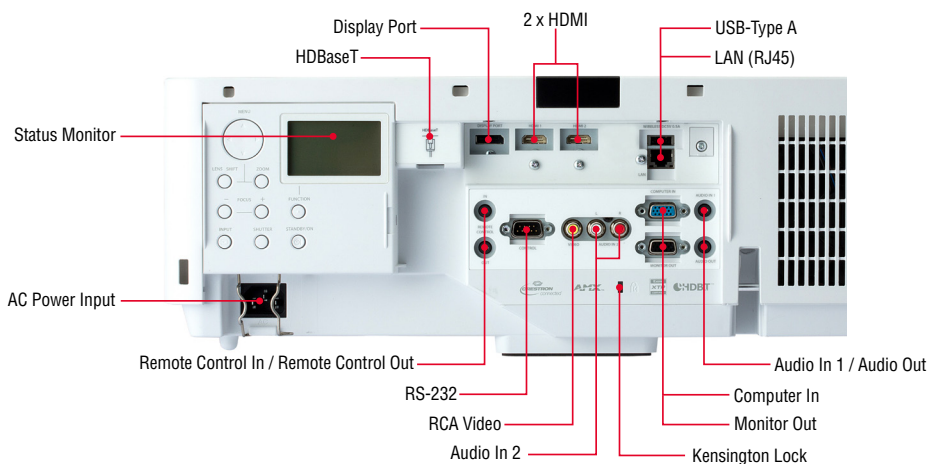


 Within... the Future
Maxell Limited
 Whitebrook Park, Lower Cookham Road
 Maidenhead, Berkshire, UK, SL6 8YA
 Tel: +44 (0)1628 585 000
www.maxelldisplay.com

Specification and photography subject to change.